





Technical Data

Flow Rates:

Manual Filters*	2"/100 GPM Max.	2" Super/100 GPM Max.	3"/200 GPM Max.
Automatic Filters*	2"/100 GPM Max. Per Filter Pod	3"/140 GPM Max. Per Filter Pod	

**Flow rates vary greatly depending on water source and solids loading.*

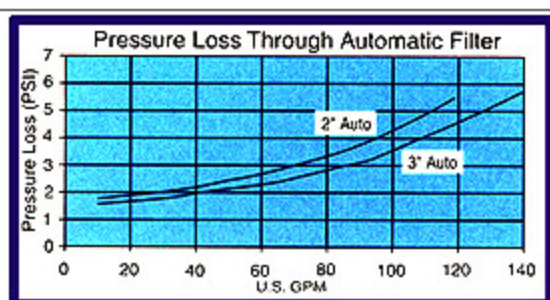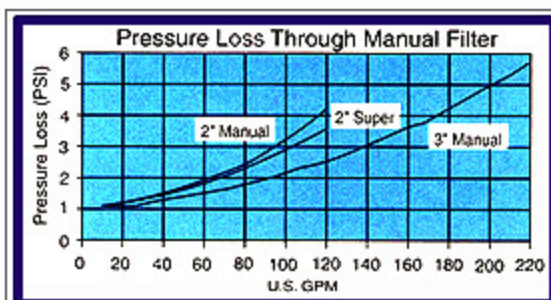

Pressure Rating:	All Units Rated to 150 PSI
Inlet/Outlet Configurations:	2" and 3" models available with NPT and/or victaulic inlet/outlet connections Inline and 90 degree (angle) configuration standard

Materials of Construction:
Housing: Polyamide
Discs: Polypropylene
Gaskets: EPDM
Clamp: Stainless Steel
Standard Automatic Manifolds: Inlet/Outlet Manifold: Type 304 SS
Solenoids: Brass/Stainless Steel
Valves: Epoxy Coated Cast Iron
Flush Manifold: PVC

Contact us at: sales@advancedwater.com

(877) 777-4909 / (321) 777-4909

Fax (321) 773-8338